

भारत सरकार  
सडक परिवहन और राजमार्ग मंत्रालय  
क्षेत्रीय कार्यालय, भुवनेश्वर  
प्लट संख्या - 184 (फायर स्टेशन चौक के पास)  
बरमुन्डा, भुवनेश्वर-751003  
दूरभाष : (0674) 2960994 & 2952994  
ई-मेल : robbsr.morth@gmail.com



Government of India  
Ministry of Road Transport & Highways  
Regional Office, Bhubaneswar  
Plot No. - 184 (Near Fire Station Square)  
Baramunda, Bhubaneswar-751003  
Ph. No.: (0674) 2960994 & 2952994  
E-mail: robbsr.morth@gmail.com

File No. RO/BBSR/Utility Services/NH-316/BBSR/102/2025 -2583

Date: 30<sup>th</sup> Mar, 2025

**Invitation of Public Comments**

**Sub:** Permission for laying of 132 KV Under Ground cable on Puri - Konark Marine Drive road from km 61/762 to 64/455 on NH-316 and crossing at km 64/455 on NH-316 through HDD method - reg.

1. Superintending Engineer, NH Division, Bhubaneswar vide letter dated 19.03.2025 has submitted a proposal on the above mentioned subject as detailed below:

Sl. No.	Chainage from km to km	Details of RoW	Carriageway width (m)	Dia of pipe (In mm)	Total length (km)	Methodology
1	Km 61/762 to 64/455 (RHS)	20.0 m	14.0 m	160 mm	2.693	HDD
2	Crossing at km 64/455	20.0 m	14.0 m		0.020	HDD

2. As per Ministry's OM No. RW/NH-33044/29/2015/S&R(R) dated 22.11.2016, the Highway Administrator will put out the application in the public domain for 30 days for seeking claims and objections (on grounds of public inconvenience, safety and general public interest, if any).

3. In view of the above, comments of public for claims/objections, if any, on the above proposal are invited online as well as in hard copy. The strip plan/location details are enclosed herewith. The same should reach to the below mentioned address within 30 days from the date of uploading it in the website, beyond which no objection will be considered.

**Address:**

Regional Officer,  
Ministry of Road Transport & Highways,  
Plot No -184, Infront of CRPF Stadium,  
Baramunda, Bhubaneswar - 751003.

Encl: As above

Yours faithfully,

  
(Sudhansu Sekhar Sahu)  
Senior Technical Assistant  
For Regional Officer

Copy to :

- 1) The Senior Technical Director, NIC, Transport Bhawan, New Delhi - 110001- along with strip chart for uploading on the Ministry's website.
- 2) General public with request to furnish comments, if any, to the above mentioned address or by e-mail to "[robbsr.morth@gmail.com](mailto:robbsr.morth@gmail.com)"

डाकरी संख्या... 2934  
तारीख... 19.03.2025  
सड़क परिवहन और राजमार्ग मंत्रालय  
क्षेत्रीय कार्यालय, भुवनेश्वर

1



TEL -0674-2972908-(0)  
eenh\_bbsr@yahoo.co.in

OFFICE OF THE EXECUTIVE ENGINEER  
NATIONAL HIGHWAY DIVISION BHUBANESWAR  
PLOT NO-184, NAYAPALLI, PO-BARAMUNDA, BHUBANESWAR

No. 1893 Dt. 19.03.2025

To

The Regional Officer  
MoRT&H, Bhubaneswar

Sub: - Permission for road cutting for laying of 132 KV Under Ground Cable from Konark-Puri Marine Drive road to 132/33kv Grid S/s Puri (Chainage no. 1370 to 4180 Mtr.).

Sir,

In inviting a reference to the subject cited above, it is to submit herewith the following documents as received from OPTCL, Bhubaneswar alongwith the site inspection report in the prescribed format duly signed for favour of information and necessary approval.

1. The layout plan alongwith cross section drawing & methodology are enclosed.
2. A strip plan showing across with chainages and LHS/RHS of road NH-316 (Puri-Konark) is enclosed.
3. A site inspection report in the prescribed proforma duly signed by the all concerned is enclosed.
4. The Bench Mark value under the mouza - Balukhanda-151 is furnished herewith.
5. Calculation sheet for Performance Bank Guarantee & License fees are enclosed herewith.

Yours faithfully,

Encl: - As above

Superintending Engineer  
N.H. Division, Bhubaneswar

Memo No. 1894 / Dt. 19.03.2025

Copy to the DGM (Elect.) OPTCL, Bhubaneswar (ehtc.div.bbs@optcl.co.in)/ S.D.O. (Elect.), EHT Construction (OPTCL), Sub-Division, Baliana (ehtc.sd.blanta@optcl.co.in) for information and necessary action with reference to his office letter no.24 dt.06.03.2025.

Superintending Engineer  
N.H. Division, Bhubaneswar

Memo No. 1895 / Dt. 19.03.2025

Copy to the Asst. Executive Engineer, NH Sub-Division, Puri for information and necessary action with reference to his letter no.31 dt.06.03.2025.

Superintending Engineer  
N.H. Division, Bhubaneswar

Please examine

20/03

Sr. 7A



### Calculation for Performance Bank Guarantee as per Utilized Area of NH -316

Name of Work: Permission for Road cutting for laying of 132 KV under Ground Cable from Konark-Puri  
Marine drive Road to 132/33 kV Grid S/S Puri (from Km 61/762 to 64/455)

Sl. No.	Pipe Dia (mm)	Length in mtr	Rate	Amount
1	2 x 160	2693.00	250	673250.00
2	2 x 160	75.00	250	18750.00
3			<b>Total =</b>	<b>692000.00</b>

As per guidelines of Ministry's circular on 22.11.2016, Performance Bank Guarantee based on Route meter valid 01 year initially as per rate Rs 100/m for Dia < 300mm and Rs 250/mt for dia >300mm


  
Assistant Engineer  
NH Section, Puri

  
Assistant Executive Engineer  
N.H. Sub-Division, Puri


  
Superintending Engineer  
N.H. Division, Bhubaneswar

## Calculation of license fees as per Utilized Area NH-316

Name of Work:		Permission for Road cutting for laying of 132 KV under Ground Cable from Konark-Puri Marine drive Road to 132/33 kV Grid S/S Puri (from Km 61/762 to 64/455)									
Sl. No.	Block	Mouza	NH	Chainage (km)	Length (m)	Width/Dia (m)	Utilized NH Area (sqm)	Circle Rate (per acre)	Circle rate (per sqm)	License fee/Annum (1.5%)-(Rs)	License fee for 5 years-(Rs)
1	Puri	Balukhand-151	316 (Konark Link)	61/762 to 64/455	2693.00	0.4	1077.20	35000000	8648.68	139745.38	698726.91
1	Puri	Balukhand-151	316 (Konark Link)	64/530	75.00	0.4	30.00	35000000	8648.68	3891.91	19459.53
					2768.00			1st Year		143637.29	
								2nd Year Enhancement @ 6% =		152255.53	
								3rd Year Enhancement @ 6% =		161390.86	
								4th Year Enhancement @ 6% =		171074.31	
								5th Year Enhancement @ 6% =		181338.77	
								Total =		809696.75	
								Say =		809697.00	

  
 Assistant Engineer  
 NH Section, Puri

  
 Assistant Executive Engineer  
 N.H. Sub-Division, Puri

  
 Superintending Engineer  
 N.H. Division, Bhubaneswar

Encloser to site Inspection report for laying of 160mm dia HDPE pipe for 132kv line crossing along and across the Road										
SL.NO.	NH NO.	NH Changing from km to km	Side of laying (LHS/RHS/Crossing)	Available ROW	Carriageway Width	Embankment	Dia of Utility including casing	Medhodology	Depth of laying	Width of Laying
1	NH-316(Puri-Konark Road)	64/455	Crossing	20MTR	7MTR	0	160MM	HDD	1850MM	
2		61/762 to 64/455	Along the Road RHS	20MTR	7MTR	0	160MM	HDD/OPEN TRENCH	1850MM	




*[Signature]*  
For OPTCL


*[Signature]* 12/3  
For NH  
Superintending Engineer  
N.H Division, Bhubaneswar




LAYING OF 132 KV CABLE ALONG NH -316 FROM CH-61/762 k.m PURI  
CH-64/530 K.M ( KONARK) RHS ROUTE LENGTH-2768 mtr(2.768 k.m)

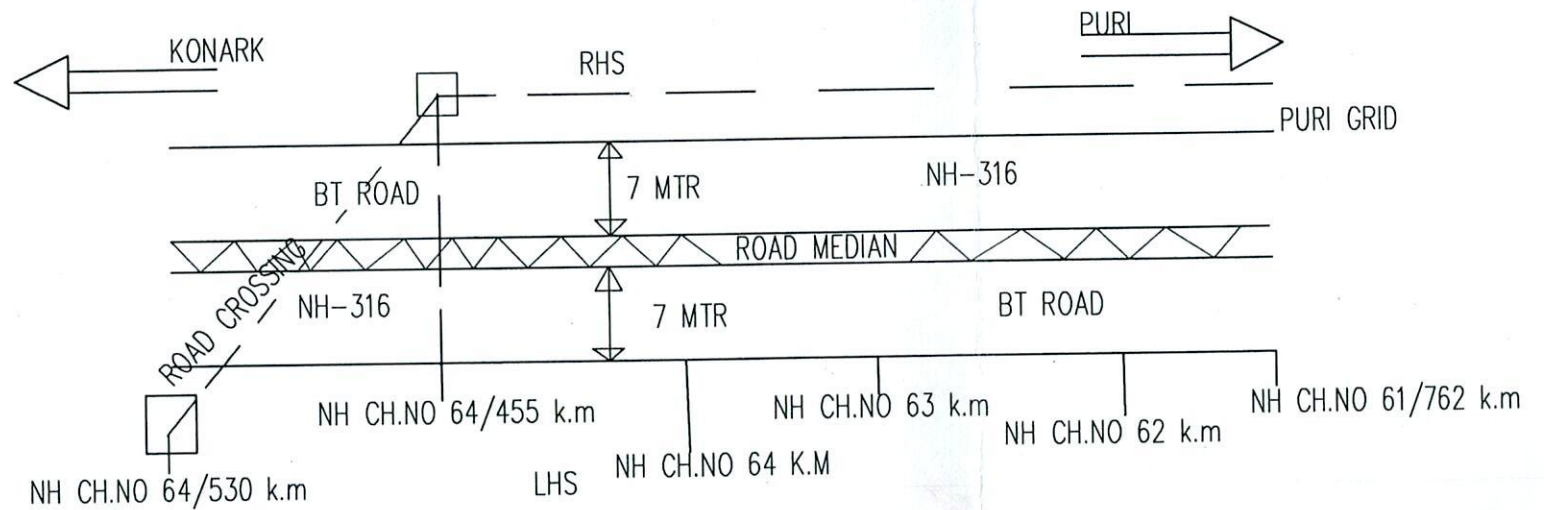

1. HDD METHOD/OPEN TRENCH EXCAVATION LENGTH -(2.693 K.M)
2. CROSSING HDD METHOD LENGTH - 75 MTR




*[Signature]*  
*[Signature]*  
 SD- ( ) BH  
 BH ( ) BH  
 BH ( ) BH

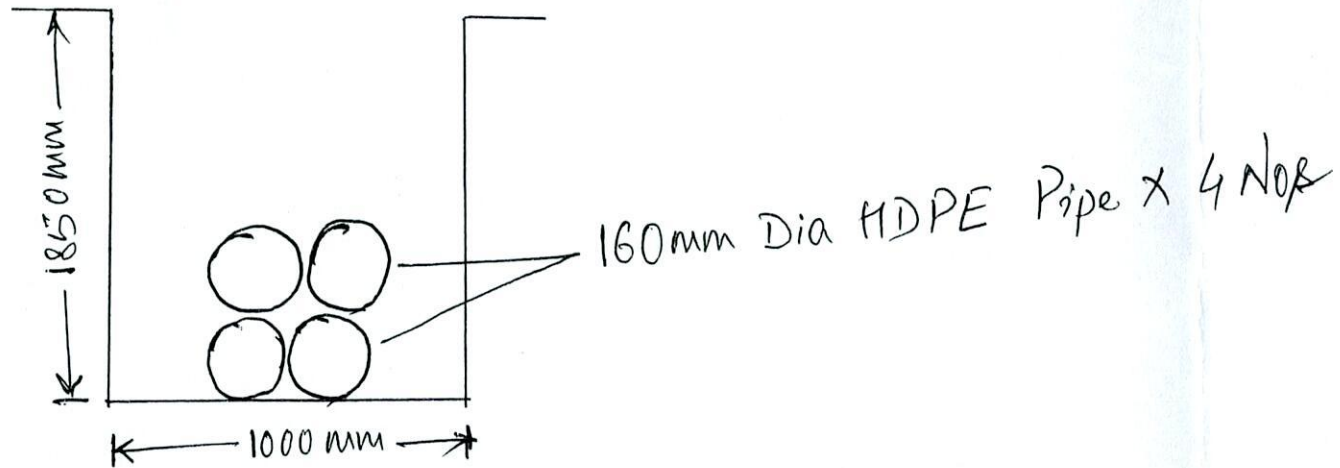

### Section:- 1

- Cross section on along and across the road.
- \* Total length across the Road = 2693 mtr
  - \* Crossing the Road = 715 mtr



*Yes*

[\(https://www.facebook.com/\)](https://www.facebook.com/)[\(https://twitter.com/login?lang=en\)](https://twitter.com/login?lang=en)

» [Skip to Main Content](#) » [Download Screen Reader \(ScreenRecorder.aspx\)](#) [A-](#) [A](#) [A+](#) | [Help \(Help.aspx\)](#)

Acre



SHOW

☆ Area : 1 - Acre

☆ Areawise Benchmark Value : ₹ 3,50,00,000

Unit Wise BenchMark Value :

₹ 3,50,00,000 [Per Acre]

₹ 8,64,90,533 [Per Hecter]

₹ 3,50,000 [Per Decimal (100D=1Acre)]

₹ 35,000 [Per Decimal (1000D=1Acre)]

₹ 8,649 [Per Square Meter]

₹ 803 [Per Square Feet]

Let's Get In Touch!

Inspector General of Registration Odisha, 2nd-floor, Board of Revenue Building,  
Chandinchowk , Cuttack (Odisha)-753002



(+91)7894438202

(+91)7894438220



Feedback

[helpdesk.igrodisha@gmail.com](mailto:helpdesk.igrodisha@gmail.com) (<mailto:helpdesk.igrodisha@gmail.com>)[Help \(Help.aspx\)](#)

Site Updated on 28-Dec-2024 06:15:20 PM

Last Data Updated on 12-Jan-2025 12:01:01 AM

Design &amp; Developed By TerraCIS Technologies Ltd.





(https://www.facebook.com/)



(https://twitter.com/login?lang=en)

» [Up to Main Content](#) [Download Screen Reader \(ScreenRecorder.aspx\)](#) [A-](#) [A](#) [A+](#) | [Help \(Help.aspx\)](#)

Inspector General of Registration  
Revenue & Disaster Management Department  
Govt. of Odisha

## Citizen Corner

### ☆ Ease of Doing Business (Ease.aspx)

- ➔ Regd. & Stamp Duty Calculator (StampDutyCalc.aspx)
- ➔ Model Deed (ModelDeed.aspx)
- ➔ Acts & Rules (ActRule.aspx)
- ➔ Stamp Act and Rules (StampAct.aspx)
- ➔ Marriage Act (Marraige.aspx)
- ➔ Partnership Firm Registration
- ➔ Society Registration
- ➔ Public Service Delivery Timeline (pdf/PublicServicesDeliveryTimeLine.pdf)

## BenchMark Valuation

### District

PURI

### Registration Office

PURI

### Village - Thana

BALUKHAND-151 - 151

### Kisam

-----All-----

### Plot No.

-----All-----

### Area

Encloser to site Inspection report for laying of 160mm dia HDPE pipe for 132kv line crossing along and across the Road										
SL.NO.	NH NO.	NH Changing from km to km	Side of laying (LHS/RHS/Crossing)	Available ROW	Carriageway Width	Embankment	Dia of Utility including casing	Medhodology	Depth of laying	Width of Laying
1	NH-316(Puri-Konark Road)	64/455	Crossing	20MTR	2x 7MTR = 14.00 mtr	0	160MM	HDD	1850MM	
2		61/762 to 64/455	Along the Road RHS	20MTR	2x 7MTR = 14.00 mtr	0	160MM	HDD/OPEN TRENCH	1850MM	

only HDD method is recommended.



For SPTCL

*[Signature]*  
 SDO (Elect.)  
 HT (C) Sub-Division  
 SPTCL, Bhubaneswar  
 For OPTCL  
*[Signature]*  
 Manager (Elect.)  
 EHT (C), Sub-Division  
 OPTCL, Bhubaneswar

*[Signature]*  
 For NH  
 Superintending Engineer  
 N.H Division, Bhubaneswar



Encloser to site Inspection report for laying of 160mm dia HDPE pipe for 132kv line crossing along and across the Road										
SL.NO.	NH NO.	NH Changing from km to km	Side of laying (LHS/RHS/Crossing)	Available ROW	Carriageway Width	Embarkment	Dia of Utility including casing	Medhodology	Depth of laying	Width of Laying
1	NH-316(Puri-Konark Road)	64/455	Crossing	20MTR	2x 7MTR = 14.00 mtr	0	160MM	HDD	1850MM	
2		61/762 to 64/455	Along the Road RHS	20MTR	2x 7MTR = 14.00 mtr	0	160MM	HDD/OPEN TRENCH	1850MM	

only HDD method is recommended



For SPTL

For OPTCL  
 SDO (Elect.)  
 EHT (C) Sub-Division  
 OPTCL, Bhubaneswar

For NH  
 Superintending Engineer  
 N.H Division, Bhubaneswar